

Tel: +27 21 557 3399

Email : info@progetto.co.za

69 Lauda Road, Killarney gardens,
7441

CK 2008/087660/23

www.progetto.co.za



Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling




PALLET WRAPPING FREESBY FREEZER

NOXON: SEMI-AUTOMATIC TURNTABLE, FOR PALLET WRAPPING WITH STRETCH FILM

- Specifically designed for reliable performance in packaging processes in **low-temperature environments**.
- **Optimized for cold environments:**
 - Ideal for refrigerated logistics and frozen food storage sectors.
 - Operates reliably in temperatures as low as **-30°C**.
- **Durable construction:**
 - Built with carbon steel treated with nanotechnology and coated with epoxy paint for superior corrosion resistance and long-lasting durability.
- **Cold-resistant components:**
 - Equipped with **oil-resistant parts** and **cold-optimized silicone cables** to ensure continuous, malfunction-free operation.
- **Efficiency and reliability:**
 - Designed to maintain high performance and durability, even in extreme cold chain conditions.
- Perfect solution for companies in the **cold chain industry**, including:
 - Refrigerated logistics
 - Frozen food storage



SCAN ME

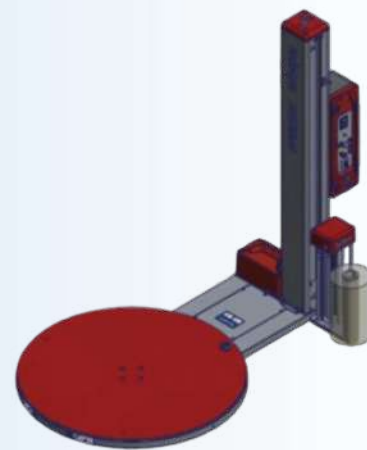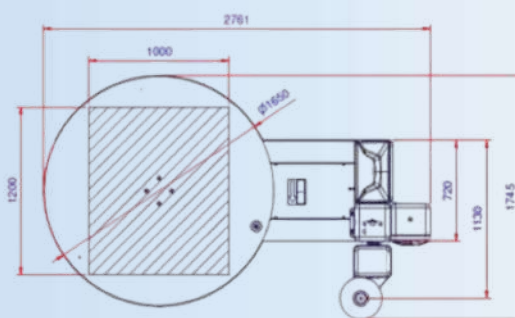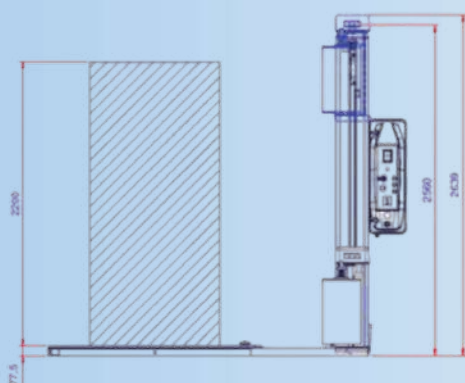

Tel: +27 21 557 3399

Email : info@progetto.co.za

69 Lauda Road, Killarney gardens,
7441

CK 2008/087660/23

www.progetto.co.za



Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling

PALLET WRAPPING FREESBY FREEZER



302

FILM CARRIAGE WITH MANUALLY ADJUSTABLE MECHANICAL BRAKE.

The "Film's Tension" adjustment allows to set the tension with which the film is applied to the product. The carriage is equipped with a quick engagement and disengagement device to facilitate the hooking of the film on the product.



312

CARRIAGE 312: is equipped with a single motor pre-stretch with fixed ratio of 250%.

The pre-stretch ratio can be customised and expanded with pre-stretch options of 150%, 200% or 300%. Film tensioning is via a load cell, which can be adjusted through the control panel.



X4 CONTROLLER

- 3.5" colour display + JOG to select programmes *DISPLAY*
- 10 pre-set winding programmes
- Possibility of film pull modification during the winding cycle
- Self-learning cycle

MACHINE	FREESBY X4 302	FREESBY X4 312
Carriage type	Electromagnetic power brake	Power Pre-stretch motorized
Film Stretch	Manual adjustment	Adjustable from panel
Pre-Stretch	Na	250%
Power supply voltage	230V 1 PH(±10%) 50/60 Hz	
Installed Power	1.5Kw	1.9Kw
Carriage up-down Speed	1,4÷4 m/min	
Table Rotation speed	5÷12 rpm	
Plate diameter	Ø 1650mm STD - Ø 1800mm OPT	
Plate Capacity	2000kg/ 4409lb STD	
Synchronised stopping	STD	
Progressive Start-up	STD	
Photocell Delay	STD	
Height Detection photocell	STD	
Front and rear Forklift Capacity	STD	

THE CONTENTS OF THESE CATALOGS HAVE BEEN VERIFIED BEFORE THE PRESS. NOXON RESERVES THE RIGHT TO MODIFY IN EVERY MOMENT THE

TECHNICAL CHARACTERISTICS OF THE PRODUCTS AND ACCESSORIES ILLUSTRATED IN THE PRESENT DOCUMENT