

Tel: +27 21 557 3399

Email : info@progetto.co.za

69 Lauda Road, Killarney gardens,
7441

CK 2008/087660/23

www.progetto.co.za



Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling




PALLET WRAPPING FREESBY INOX

NOXON: SEMI-AUTOMATIC TURNTABLE, FOR PALLET WRAPPING WITH STRETCH FILM

- Designed to meet the packaging needs of industries requiring **high hygiene standards**.
- **Full stainless steel construction:**
 - Provides maximum corrosion resistance.
 - Ensures easy cleaning and maintenance.
 - Delivers exceptional durability, even in demanding environments.
- **Hygiene-focused design:**
 - Ideal for sectors where cleanliness and sanitation are critical.
- **Reliable and practical:**
 - Combines efficiency with ease of use to optimize production flows.
- Perfect for sensitive environments, including:
 - Food industry
 - Pharmaceutical sector
 - Chemical industry



SCAN ME

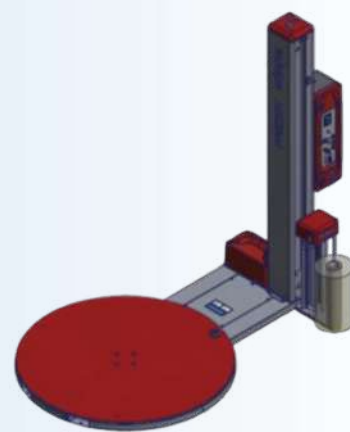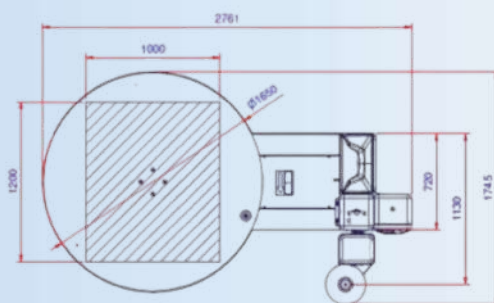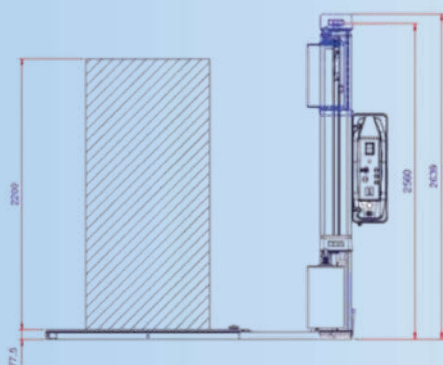

Tel: +27 21 557 3399

Email : info@progetto.co.za

69 Lauda Road, Killarney gardens,
7441

CK 2008/087660/23

www.progetto.co.za



Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling

PALLET WRAPPING FREESBY INOX



X4 CONTROLLER

- 3.5" colour display + JOG to select programmes *DISPLAY*
- 10 pre-set winding programmes
- Possibility of film pull modification during the winding cycle
- Self-learning cycle



X5 CONTROLLER

- 7" touch screen colour display
- New design and user experience
- 16 winding programmes and 8 pre-set applications
- Possibility of customising and modifying winding parameters
- Cruise Control mode (automatic winding speed adjustment)



310

CARRIAGE 310: equipped with *film stretching device by electromagnetic brake* adjustable from control panel. Brake coupling after cycle start for easy film hooking to pallet base.



312

CARRIAGE 312: is equipped with a *single motor pre-stretch with fixed ratio of 250%*. The pre-stretch ratio can be customised and expanded with pre-stretch options of 150%, 200% or 300%. Film tensioning is via a load cell, which can be adjusted through the control panel.



314

CARRIAGE 314: features *two independent motors that allow variable film pre-stretching from 150% to 400%*. Both pre-stretching and film tensioning can be adjusted via the control panel through a load cell.

MACHINE	FREESBY X4 310	FREESBY X4 312	FREESBY X5 314
Carriage type	Electromagnetic power brake	Power Pre-stretch motorized	2 Variable pre-stretch motors
Film Stretch	Adjustable from panel	Adjustable from panel	Adjustable from panel
Pre-Stretch	Na	250%	150÷400%
Power supply voltage	230V 1 PH(±10%) 50/60 Hz		
Installed Power	1.5Kw	1.9Kw	2.3Kw
Carriage up-down Speed	1,4÷4 m/min		
Table Rotation speed	5÷12 rpm		
Plate diameter	Ø 1650mm STD - Ø 1800mm OPT		
Plate Capacity	2000kg/ 4409lb STD		
Synchronised stopping	STD		
Progressive Start-up	STD		
Photocell Delay	STD		
Height Detection photocell	STD		
Front and rear Forklift Capacity	STD		

THE CONTENTS OF THESE CATALOGS HAVE BEEN VERIFIED BEFORE THE PRESS. NOXON RESERVES THE RIGHT TO MODIFY IN EVERY MOMENT THE TECHNICAL

CHARACTERISTICS OF THE PRODUCTS AND ACCESSORIES ILLUSTRATED IN THE PRESENT DOCUMENT