

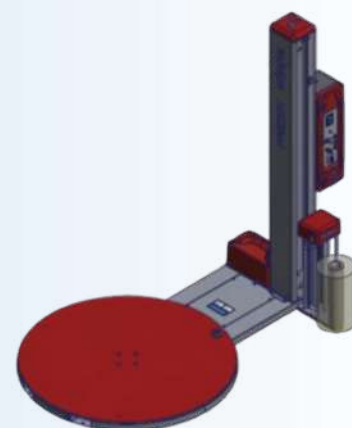


www.progetto.co.za

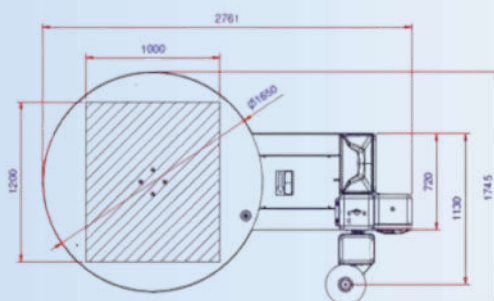

PALLET WRAPPING FREESBY RANGE

- A new generation of turntable stretch wrapping machines redefining industry standards in reliability and productivity.
- Enhanced reliability and productivity - Built to stabilize light and irregular loads efficiently.
- Ease of use - Equipped with user-friendly, multifunctional control panels (X4 and X5).
- Panels allow programming and monitoring of all machine cycles.
- Customizable wrapping programs and adjustable film pull levels via the control panel.
- Advanced technology - Supports remote monitoring of functions through the N-Connect system.
- Versatile film pulling system - Three different carriages available, featuring an electromagnetic brake.
- Adjustable film pulling device for optimal performance.
- Designed for industries that require stabilization of light, irregular loads, and efficient pallet wrapping solutions.

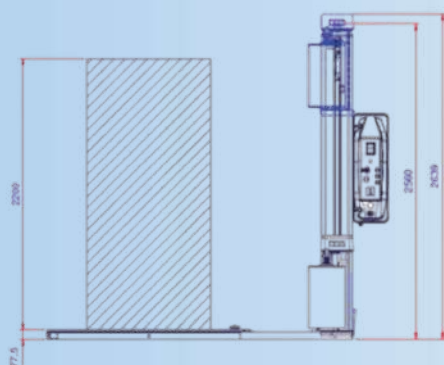

Tel: +27 21 557 3399

Email : info@progetto.co.za

69 Lauda Road, Killarney gardens,
7441

CK 2008/087660/23

www.progetto.co.za



Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling

PALLET WRAPPING FREESBY RANGE



X4 CONTROLLER

- 3.5" colour display + JOG to select programmes *DISPLAY*
- 10 pre-set winding programmes
- Possibility of film pull modification during the winding cycle
- Self-learning cycle



X5 CONTROLLER

- 7" touch screen colour display
- New design and user experience
- 16 winding programmes and 8 pre-set applications
- Possibility of customising and modifying winding parameters
- Cruise Control mode (automatic winding speed adjustment)



310

CARRIAGE 310: equipped with **film stretching device by electromagnetic brake** adjustable from control panel. Brake coupling after cycle start for easy film hooking to pallet base.



312

CARRIAGE 312: is equipped with a **single motor pre-stretch with fixed ratio of 250%**. The pre-stretch ratio can be customised and expanded with pre-stretch options of 150%, 200% or 300%. Film tensioning is via a load cell, which can be adjusted through the control panel.



314

CARRIAGE 314: features **two independent motors that allow variable film pre-stretching from 150% to 400%**. Both pre-stretching and film tensioning can be adjusted via the control panel through a load cell.

MACHINE	FREESBY X4 310	FREESBY X4 312	FREESBY X5 312	FREESBY X5 314
Carriage type	Electromagnetic power brake	Power Pre-stretch motorized	Power Pre-stretch motorized	2 Variable pre-stretch motors
Film Stretch	Manual adjustment	Adjustable from panel	Adjustable from panel	Adjustable from panel
Pre-Stretch	Na	250%	250%	150÷400%
Power supply voltage	230V 1 PH(±10%) 50/60 Hz			
Installed Power	1.5Kw	1.9Kw	1.9Kw	2.3Kw
Carriage up-down Speed	1,4÷4 m/min			
Table Rotation speed	5÷12 rpm			
Plate diameter	Ø 1650mm STD - Ø 1800mm OPT			
Plate Capacity	2000kg/ 4409lb STD			
Synchronised stopping	STD			
Progressive Start-up	STD			
Photocell Delay	STD			
Height Detection photocell	STD			
Front and rear Forklift Capacity	STD			

THE CONTENTS OF THESE CATALOGS HAVE BEEN VERIFIED BEFORE THE PRESS. NOXON RESERVES THE RIGHT TO MODIFY IN EVERY MOMENT THE TECHNICAL CHARACTERISTICS OF THE PRODUCTS AND ACCESSORIES ILLUSTRATED IN THE PRESENT DOCUMENT