

Tel: +27 21 557 3399

E-mail: info@progetto.co.za

69 Lauda Road, Killarney Gardens,



PALLET WRAPPING “BOOM P”

NOXON: SEMI-AUTOMATIC ROTATING ARM STRETCH WRAPPING MACHINE FOR UNSTABLE OR HEAVY PRODUCTS

NOXON

flexibility & innovation



- **Optimized for Unstable Loads:**

- Designed specifically to stabilize **unstable loads** during the wrapping process.
- Features a semi-automatic **rotating arm** for reliable and precise wrapping.

- **Enhanced Film Tension Control:**



- Equipped with a **carriage with an electromagnetic brake**.
- Film tension is **automatically adjustable** from the control panel for consistent wrapping results.

- **User-Friendly Operation:**

- Includes a **jog control panel** for easy and intuitive operation.
- Enables precise customization of settings, such as:
 - **Arm rotation speed.**
 - **Carriage movement** (up/down).
 - **High and low speed adjustments.**
 - **End-of-cycle carriage adjustments.**

- **Key Benefits:**

- Ensures the stability of irregular and delicate loads.
- Simplifies operation with a focus on accuracy and efficiency.

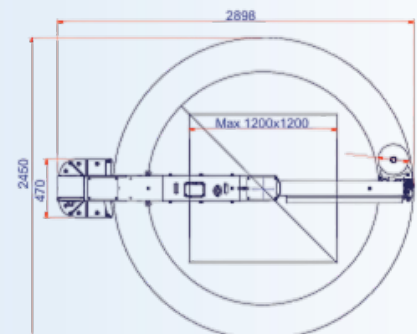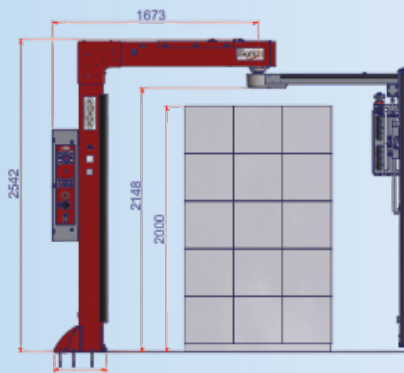

SCAN ME

Tel: +27 21 557 3399

E-mail: info@progetto.co.za

69 Lauda Road, Killarney Gardens,



PALLET WRAPPING "BOOM P"



CONTROL PANEL WITH JOG

- Arm rotating speed
- Top wraps
- Bottom wraps
- Upward-downward speed carriage
- Upward-downward cycle
- Upward or downward cycle
- Photocell delay
- Manual carriage upward-downward
- Rotary arm phasing button
- Carriage height at end cycle



CARRIAGE 210

Carriage with electromagnetic brake, film tensioning adjustable from control panel in 4 different moment (to the bottom, upward, to the top and downward)

MACHINE	BOOM
Carriage type	Electromagnetic power brake
Film stretch	Adjustable from panel
Pre-stretch	Na
Power supply voltage	230V 1 PH(±15%) 50/60 Hz
Carriage up-down speed	2,6÷6 m/min
Arm rotation speed	7÷11 RPM
Productivity	20 (pallet/h)
Min product dimension	LxWxH 500x500x500 mm
Max product dimension	LxWxH 1200x1200x2000 mm (LxWxH 1200x1200x2400 mm OPT)
Emergency Bumper	STD
Max. Load Height	2000mm
Soft start	STD
Load height sensing by photocell - altimeter	STD
FILM FEATURES	
Reel max external diameter	ØxH 275x500 mm
Internal reel diameter	76 mm
Film thickness	7÷35 µm
Max reel weight	8 kg

THE CONTENTS OF THESE CATALOGS HAVE BEEN VERIFIED BEFORE THE PRESS. NOXON RESERVES THE RIGHT TO MODIFY IN EVERY MOMENT THE TECHNICAL CHARACTERISTICS OF THE PRODUCTS AND ACCESSORIES ILLUSTRATED IN THE PRESENT DOCUMENT