

Tel: +27 21 557 3399
Email : info@progetto.co.za
CK 2008/087660/23
69 Lauda Road,
Killarney gardens, 7441



Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling




PALLET WRAPPER SPEEDY MAS

NOXON: SPEEDY MAS – Self-Propelled Entry-Level Robot for Stretch Film Packaging



- **Iconic pallet wrapping machine**, combining **ease of use**, **flexibility**, and **reliable productivity**.
- **Self-propelled and highly versatile**, making it **ideal for companies with diverse packaging needs**.
- **Latest-generation design** by Noxon, ensuring **efficiency and adaptability** in various industrial applications.
- **User-friendly controls** and **intelligent operation** for **seamless wrapping performance**.

MACHINE DIMENSIONS	
A	732mm
B	1138mm
C	1243mm
D	1030mm
E	2192mm
F	2470mm
R	1100mm

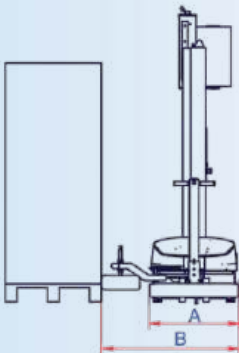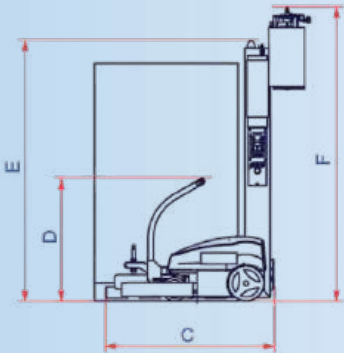

Carton Packing Systems • Conveyor Systems • Palletisers • Pallet Wrappers • Carton Sealers • Labelling • Filling

PALLET WRAPPER SPEEDY MAS



Control Panel

Carriage with mechanical brake on idler roller. The manually adjustable brake acts on the rubber roller to allow adjustment of the winding tension

Control Panel

- Feeding speed
- Film tension
- Bottom wraps
- Top wraps
- Carriage upwards– downward speed
- Upward-downward or alternate cycle
- Top Sheet cycle



TECHNICAL FEATURES	SPEEDY MAS 102
Carriage type	Mechanical brake
Film stretch	Manual adjustment
Pre-stretch	N/A
Power supply	100-240 V /1Ph 50/60 Hz
Carriage up-down speed	1÷4.6 m/min
Rotation speed	38÷65m/min
Batteries	n°2 12V 69 Ah (10 ore di scarica) Pb
Installed power	0.3 kW
Min product dimensions	LxWxH 600x600x500 mm
Max product dimensions	LxWxH ∞x∞x2200 mm
Minimun load weight	45 kg
Bottom wraps	STD
Top wraps	STD
Reinforcing wraps	STD
FILM FEATURES	
Reel dimensions	øxH 300x500
Internal reel diameter	76 mm
Film thickness	17÷35 µm
Max reel weight	20 kg